

Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Very Low Power Consumption:
Less than 28Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
UV Stabilized C Lens and Aluminium alloy Lamp Shell.
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.



Benefits

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Mall center lighting
- Corridor lighting
- Furniture lighting
- Hotel lighting
- Other lighting

Product Specifications:

Lens	PC
Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Hole Diameter	∅ 210mm
Wattage	28W
Power Factor	PF ≥ 0.9
Operating frequency	50-60Hz
Operating Temperature	-20°C ∽ +60°C
Storage Temperature	-30°C ∽ +70°C
Net Weight per piece (g)	1180g
Certification	CE Approved; RoHS Compliant

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
DL-WW56C	120	1680 ± 5%	2700-3500K	Warm White	≥ 80
DL-NW56C	120	1680 ± 5%	4500-5000K	Neutral White	≥ 80
DL-W56C	120	1890 ± 5%	6000-6500K	White	≥ 75

DL- / XX / 56 / C

① ② ③ ④

- ① DL: Down light
- ② XX: WW: (Warm White) NW (Neutral White)
 W (White)
- ③ 56: 56pcs of LED
- ④ C: AC100-240V input


Product Dimensions:

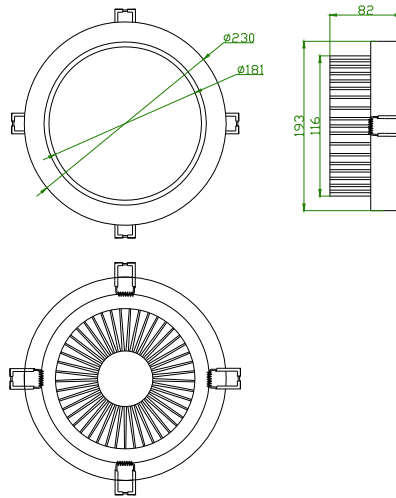

NOTES:

1. All dimensions unit in mm
2. Tolerances is ± 0.5 mm unless otherwise noted.

Package Dimension

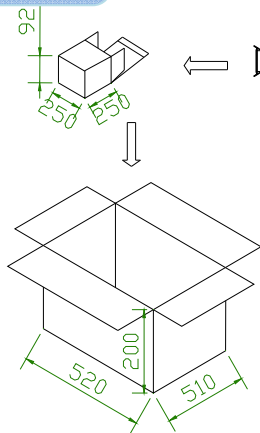

Small carton
250L*250W*90Hmm
(9.84"L*9.84"W*3.54H)
1pcs Down Light inside

Big carton
520L*510W*200Hmm
(20.47"L*20.08"W*7.88"H)
8pcs Down Light inside

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.