

Features:



- No UV or IR light radiation.
- Provide 180° beam angles.
- Very Low Power Consumption:
Less than 1.3Watts
- Long lifetime: 25000 hours (L₇₀).
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C~+60°C.
- 12V DC input.
- LED type: 5050SMD

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Used in automobile lights: Turn Signal
lamp, .Backup lamp, Stop lamp

Product Specifications:

Input Voltage	12V DC
Wattage	1.3W
Operating Temperature	-20℃ ∞ +60℃
Storage Temperature	-30℃ ∞ +70℃
Certification	RoHS Compliant

Product Selection Guide:

Product	Beam Angle(deg)	Total Lumens(lm)	Color Temp /Wavelength	Color	CRI
G4-WW10R-5050	180°	130±5%	2700-3500K	Warm White	≥80
G4-W10R-5050	180°	150±5%	6000-6500K	White	≥75

G4-XX/10/R/-5050

① ② ③ ④ ⑤

① G4: Lamp base model


④ R:DC12V

② XX:WW(Warm White) W(White)

⑤ 5050: 5050 SMD LED

③ 10: 10 pcs of LED

Product Dimensions:

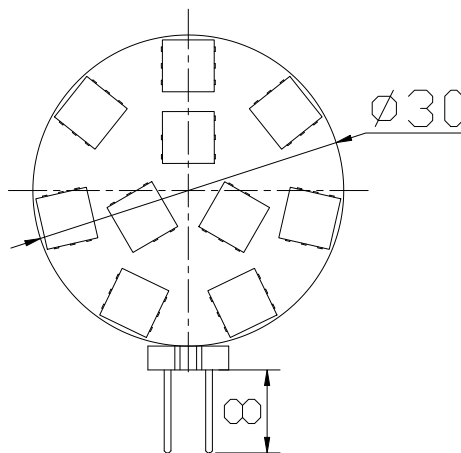

Notes:

1. All dimensions unit in mm
2. Tolerances is $\pm 0.5\text{mm}$ unless otherwise noted.

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.