



Feature:

- No UV or IR light radiation.
- Provide 180° beam angles.
- Easy Installation:
Using Existing E27/E26/B22 Base Fixture
- Very Low Power Consumption:
Less than 7Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
UV Stabilized glass Lampshade and Aluminium alloy Lamp Shell.
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.
- LED Type: 5730 LED

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	E27/E26/B22 Base
Wattage	7W
Power Factor	PF \geq 0.9
Operating Frequency	50-60Hz
Operating Temperature	-20℃ \sim +60℃
Storage Temperature	-30℃ \sim +70℃
Net Weight per piece (g)	120g
Certification	ROHS Compliant

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GL-WW14C	180°	537 \pm 5%	2700-3500K	Warm White	\geq 80
GL-NW14C	180°	572 \pm 5%	4000-4500K	Neutral White	\geq 80
GL-W14C	180°	612 \pm 5%	6000-6500K	White	\geq 75

GL/XX/14/C

① ② ③ ④ ⑤

- ① GL: Bulb Light
- ② XX: W (White) NW (Neutral White) WW (Warm White)
- ③ 14: 14 pcs of LED
- ④ C: AC 100-240V


Product Dimensions:

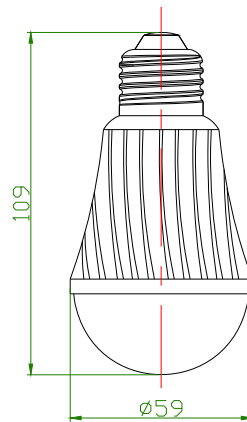

NOTES:

1. All dimensions unit in mm
2. Tolerances are $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension

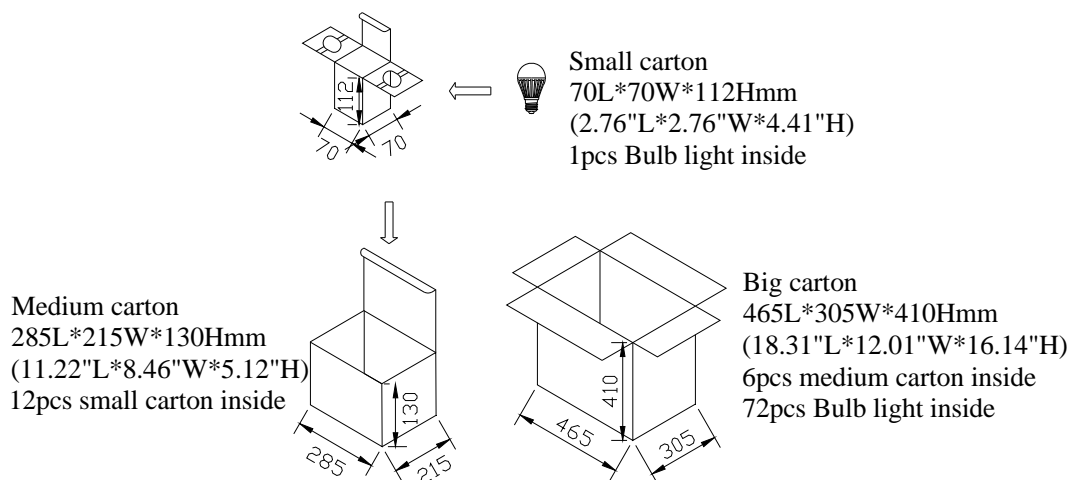

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.