


1W High Power Yellow LED  
Technical Data Sheet

Part No.: HP60MUYC

## Features:


- ◇ Very long operating life (up to 100k hours).
- ◇ Available in white, green, blue, red, yellow.
- ◇ More energy efficient than incandescent and most halogen lamps.
- ◇ Low voltage DC operated.
- ◇ Cool beam, safe to the touch.
- ◇ Instant light (less than 100ns).
- ◇ The product itself will remain within RoHS compliant Version.

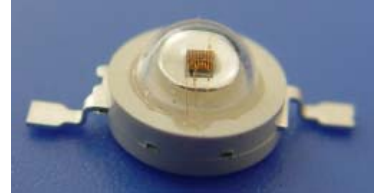

## Applications:

- ◇ Reading lights (car, bus, aircraft).
- ◇ Portable (flashlight, bicycle).
- ◇ Mini\_accent/Uplighters/Downlighters/Orientation.
- ◇ Bollards/Security/Garden.
- ◇ Cove/Undershelf/Task.
- ◇ Automotive rear combination lamps.
- ◇ Traffic signaling/Beacons/ Rail crossing and Wayside.
- ◇ Indoor/Outdoor Commercial and Residential Architectural.
- ◇ Edge\_lit signs (Exit, point of sale).
- ◇ LCD Backlights/Light Guides.

### Mechanical Dimensions:

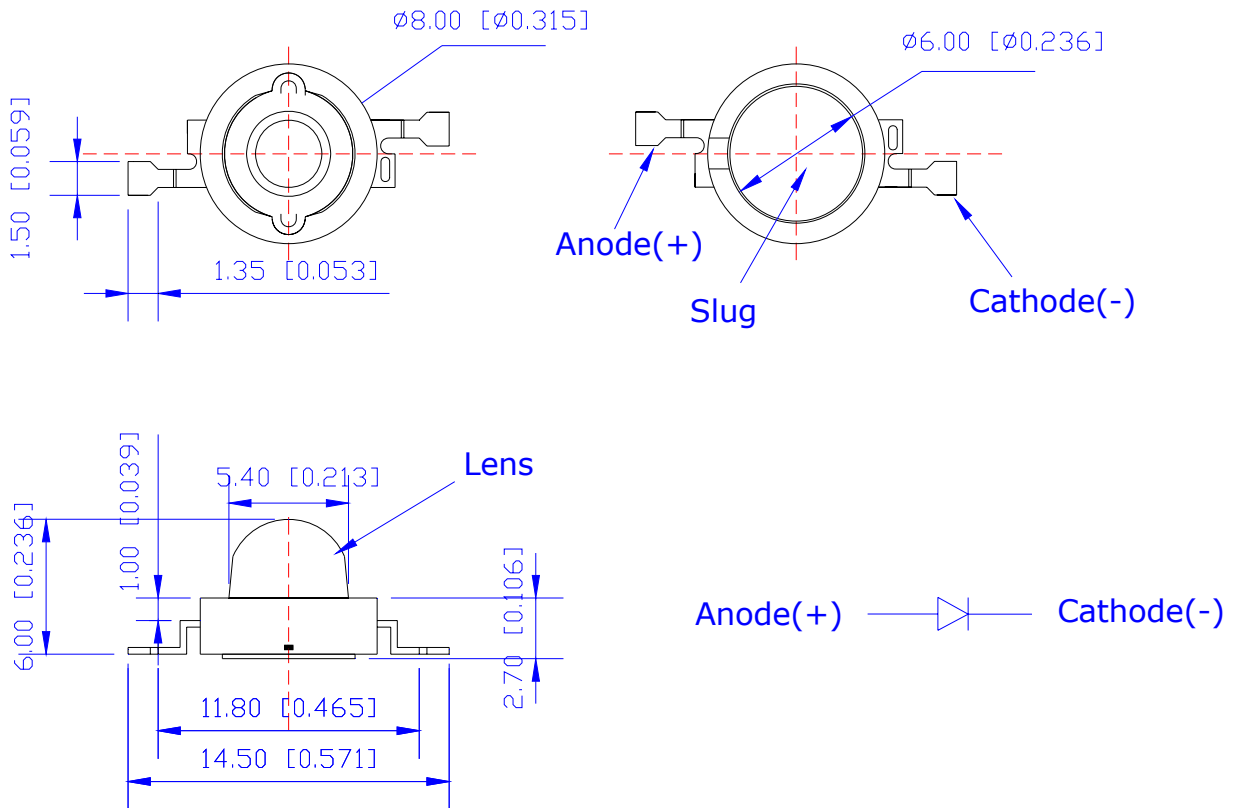

Part No.	Chip Material	Lens Color	Source Color
HP60MUYC	AlGaInP	Water Clear	Yellow

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.00mm (.039") max.
4. Specifications are subject to change without notice.

**Absolute Maximum Ratings at Ta=25°C**

Parameters	Symbol	Rating	Units
Power Dissipation	PD	1000	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	700	mA
Forward Current	IF	350	mA
Reverse Voltage	VR	5	V
LED Junction Temperature	Tj	125	°C
Operating Temperature Range	Topr	-40°C to +85°C	
Storage Temperature Range	Tstg	-40°C to +100°C	
Soldering Time at 260 °C (Max.)	Tsol	260°C for 5 Seconds	

**Notes:**

1. Proper current derating must be observed to maintain junction temperature below the maximum.
2. LEDs are not designed to be driven in reserve bias.




**Electrical Optical Characteristics at Ta=25°C**

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Flux	$\Phi_v$	30	40	---	lm	IF=350mA
Viewing Angle [1]	2 $\theta$ 1/2	---	135	---	Deg	IF=350mA
Peak Emission Wavelength	$\lambda_p$	---	592	---	nm	IF=350mA
Dominant Wavelength	$\lambda_d$	---	590	---	nm	IF=350mA
Spectrum Radiation Bandwidth	$\Delta\lambda$	---	15	---	nm	IF=350mA
Forward Voltage [2]	VF	1.80	2.20	3.00	V	IF=350mA
Reverse Current	IR	---	---	10	$\mu$ A	VR=5V


**Notes:**

1. 2 $\theta$ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. Forward Voltage measurement tolerance:  $\pm 0.10V$ .


Typical Electrical-Optical Characteristics Curves  
 (25°C Ambient Temperature Unless Otherwise Noted)

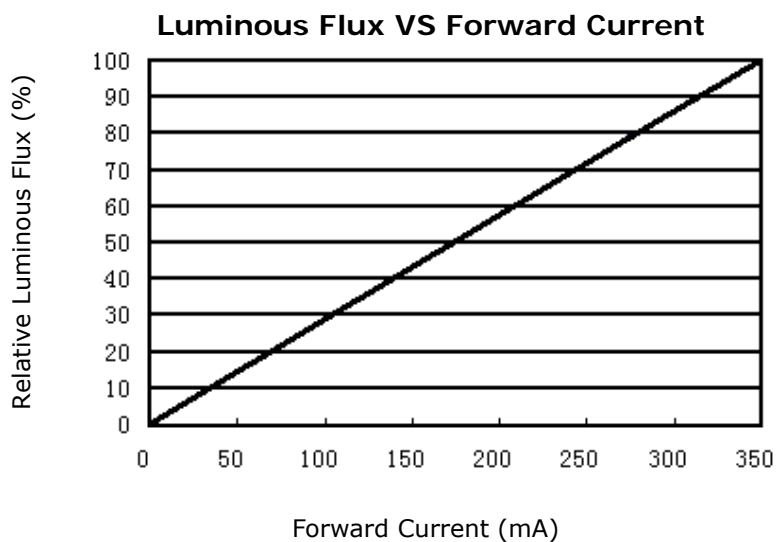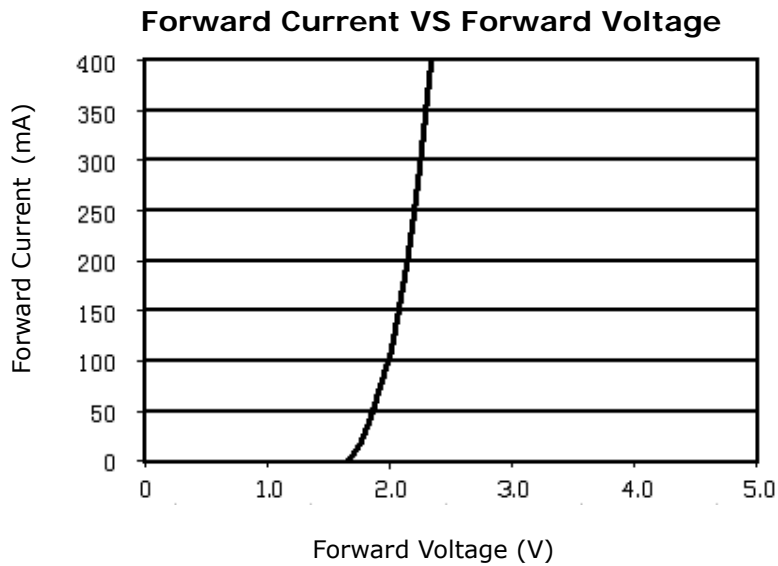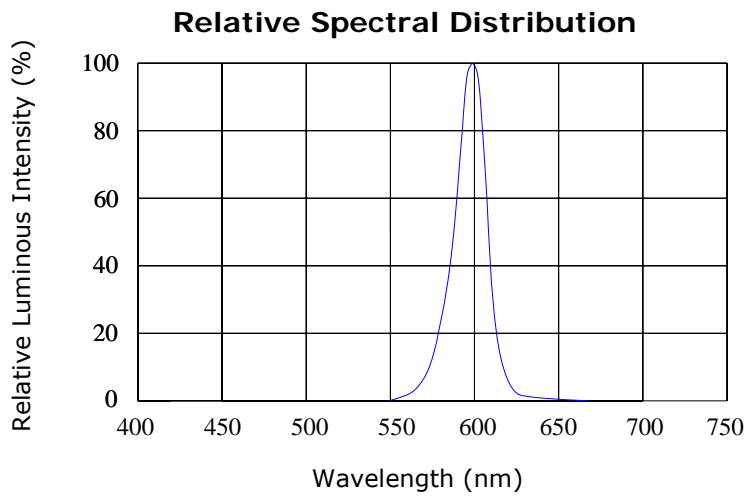

### Maximum Current VS Ambient Temperature

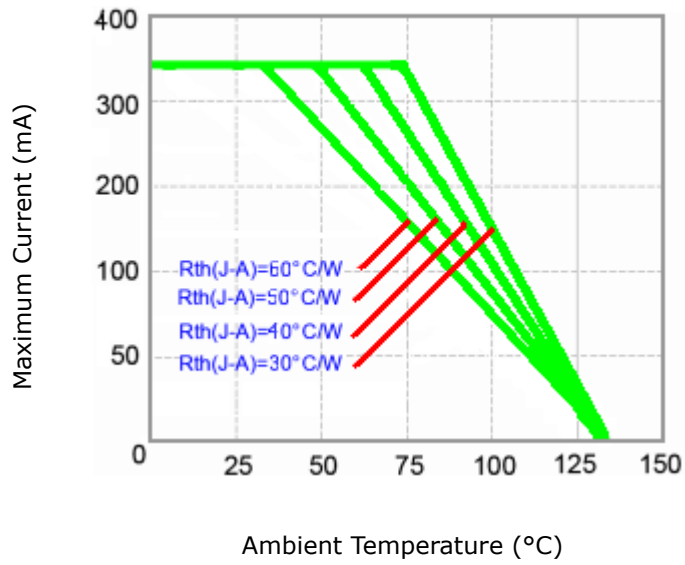

### Typical Spatial Radiation Pattern

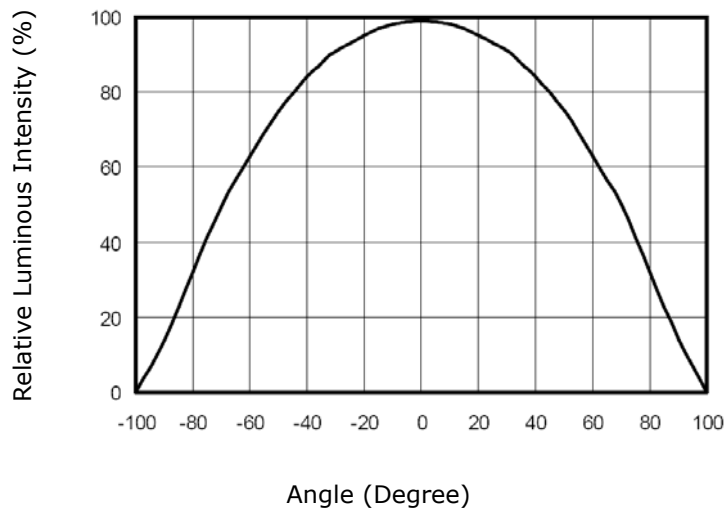

Please read the following notes before using the product:

### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 80%RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.

2.5 The LEDs should be used within 168 hours (7 days) after opening the package.

2.6 If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5°C for 24 hours.

### 3. Soldering Condition

When soldering, for Lamp without stopper type and must be leave a minimum of 3mm clearance from the base of the lens to the soldering point.

To avoided the Epoxy climb up on lead frame and was impact to non-soldering problem, dipping the lens into the solder must be avoided.

Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:

Soldering Iron		Wave Soldering	
Temperature	300°C Max.	Pre-heat	100°C Max.
Soldering Time	3 sec. Max. (one time only)	Pre-heat Time	60 sec. Max.
		Solder Wave	260°C Max.
		Soldering Time	5 sec. Max.


Note: Excessive soldering temperature and / or time might result in deformation of the LED lens or catastrophic failure of the LED.

### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

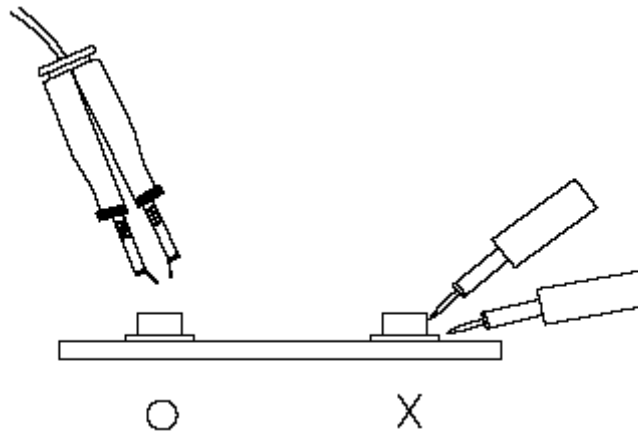

## 6. Caution in ESD

Static Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.