



Features:

- No UV or IR light radiation.
- Provide 25° beam angles.
- Easy Installation:
Using Existing GU10bi-pin Fixture
- Very Low Power Consumption:
Less than 5 Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
UV Stabilized PMMA Lens and Ceramics Lamp Shell.
- High CRI: 70-85
- Correlated Color Temperature:2700-12000K
- Operating temperature: -20°C~+60°C.
- AC100-240V input.


Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Dimensions:

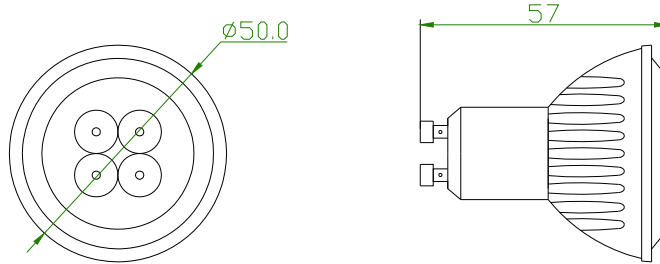

Notes:

1. All dimensions unit in mm
2. Tolerances are $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension

