



Features:

- No UV or IR light radiation.
- Provide 45° beam angles.
- Very Low Power Consumption:
Less than 4Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
UV Stabilized PMMA Lens and Aluminium alloy Lamp Shell.
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.

Benefits

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Mall center lighting
- Corridor lighting
- Furniture lighting
- Hotel lighting
- Other lighting

Product Specifications:

Lens	PMMA
Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	---
Wattage	4W
Power Factor	PF \geq 0.85
Operating frequency	50-60Hz
Operating Temperature	-20 $^{\circ}$ C \sim +60 $^{\circ}$ C
Storage Temperature	-30 $^{\circ}$ C \sim +70 $^{\circ}$ C
Net Weight per piece (Kg)	0.20Kg
Certification	CE Approved; RoHS Compliant

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
CL-HWW1W3C	45	240 \pm 5%	2900-3300K	Warm White	\geq 80
CL-HW1W3C	45	280 \pm 5%	5500-6500K	White	\geq 75

CL- / H / XX / 1W / 3 / C

① ② ③ ④ ⑤ ⑥

- ① CL: Ceiling light
- ② H: High Power LED Type
- ③ XX: W (White Color) WW(Warm White)
- ④ 1W: The single LED power is 1W
- ⑤ 3: 3 pcs of LED
- ⑥ C: AC 100-240V


Product Dimensions:

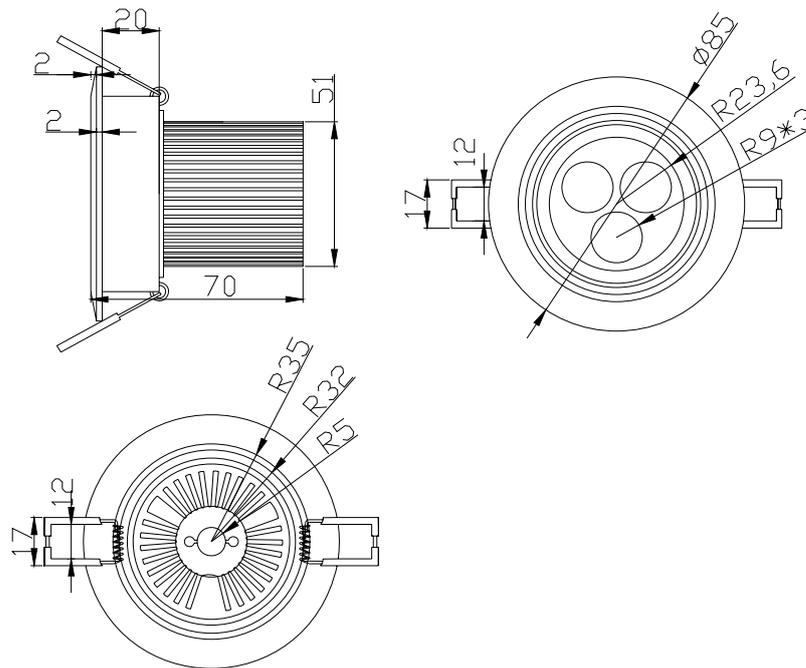

NOTES:

1. All dimensions unit in mm
2. Tolerances is ± 0.5 mm unless otherwise noted.

Package Dimension

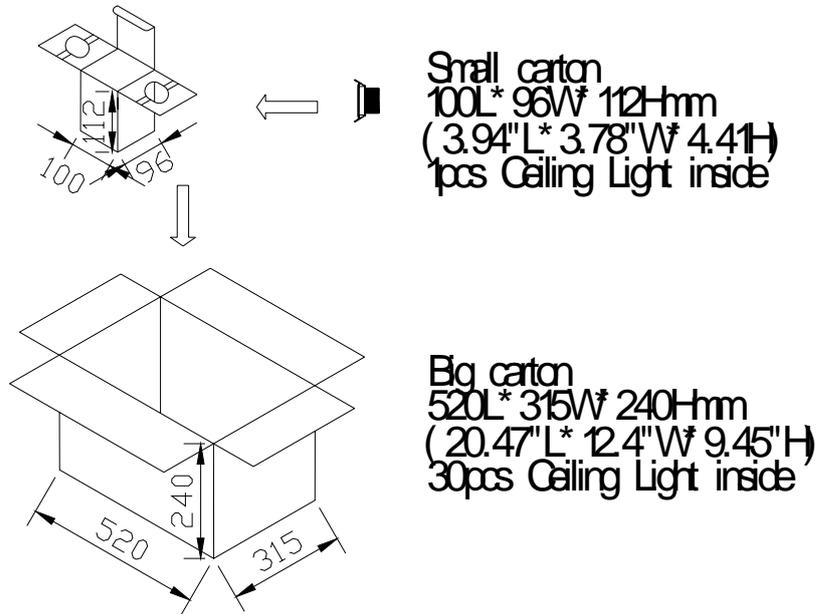

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.