



### Features:

- No UV or IR light radiation.
- Provide 150° beam angles.
- Easy Installation:  
Using Existing GU10 Fixture
- Very Low Power Consumption:  
Less than 3 Watts
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Sturdy Construction:  
Glass Lamp Shell.
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Replaces GU10 Halogen Bulbs up to 25Watts
- Operating temperature: -20°C~+60°C.
- 220V AC input.
- LED type: 3528LED

### Benefits


- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation

### Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other lighting




Product Dimensions:

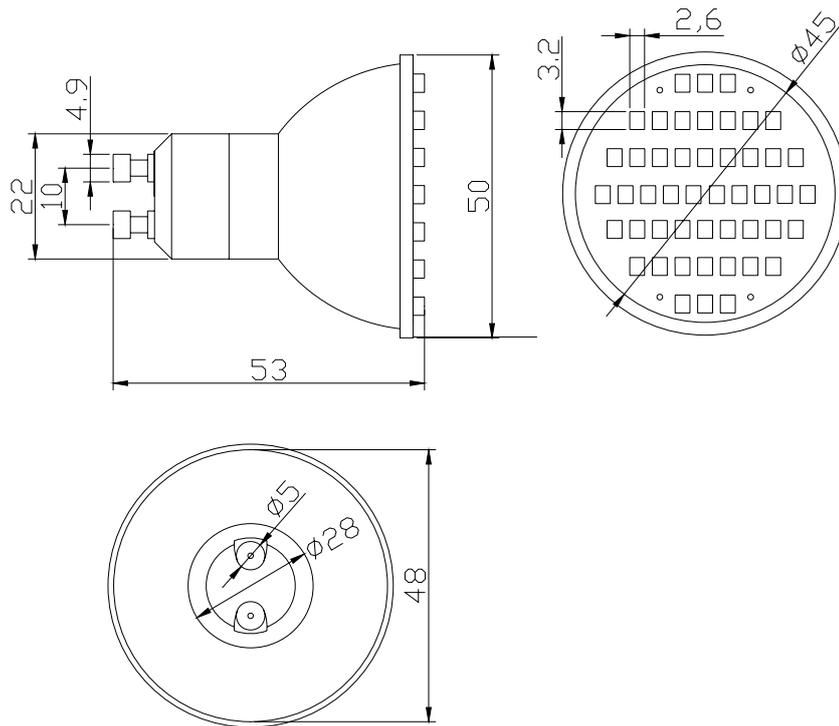

NOTES:

1. All dimensions unit in mm
2. Tolerances is  $\pm 0.5$ mm unless otherwise noted.

Package Dimension

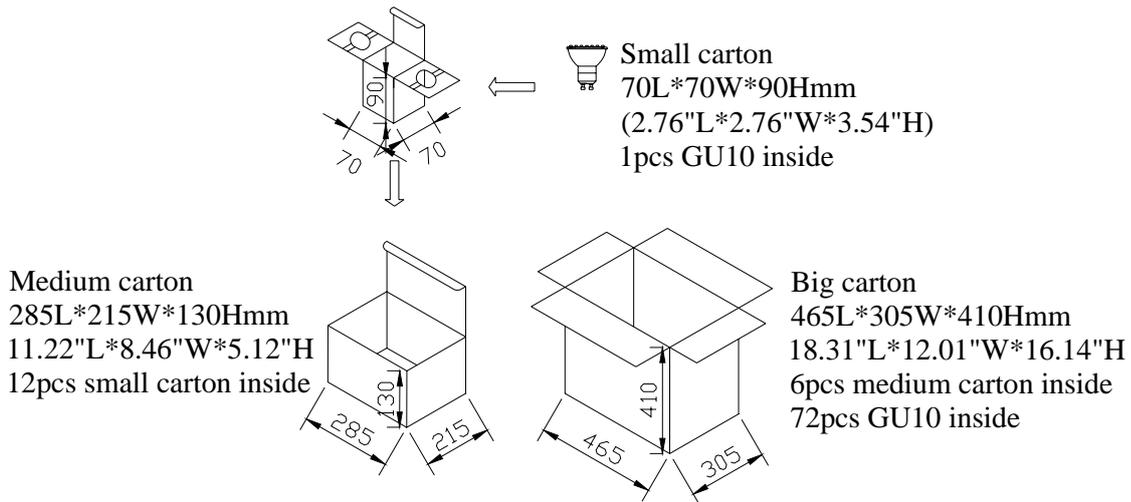

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.