LED Ceiling light Lamp Series Data Sheet



Features:

- No UV or IR light radiation.
- Lens angle can be 30/45/60 and Rotating.
- Very Low Power Consumption: Less than 10Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction: UV Stabilized PMMA Lens And Aluminium alloy Lamp Shell.
- High CRI: 75-80
- Correlated Color Temperature: 2700-6000K
- Operating temperature: $-20^{\circ}C \sim +60^{\circ}C$.
- 100-240V AC input.
- Lamp shell can rotating 180 °.

Benefits

• Energy Cost Savings:

Over 60% Compared to Incandescent.

• Solid-State:

High-Shock & High-Vibration Resistant, Both Electrical and Mechanical

- Eco-Friendly:
- No Mercury, No Lead Content
- No Hazardous Emissions:
- No UV or IR Radiation
- Constant Light Output:
- Even Lighting, Non-Halation

Application:

- Mall center lighting
- Corridor lighting
- Furniture lighting
- Hotel lighting
- Supermarket shopping mall lighting
- Other lighting

Product Specifications:

Lens	РММА		
Lamp Shell	Aluminium alloy		
Input Voltage	100~240V AC		
Wattage	10W		
Power Factor	PF≧0.7		
Operating Frequency	50-60Hz		
Operating Temperature	-20°C ∽ +60°C		
Storage Temperature	-30°C ∽ +70°C		
Net Weight per piece (Kg)	0.77Kg		
Certification	CE Approved; RoHS Compliant		
size	H80*D127*120		

Product Selection Guide:

Product	Beam Angle	Total Lumens	ССТ	Color	CRI
CL-HWW10WC3C	45°	500±5%	2900-3300K	Warm White	≧80
CL-HW10WC3C	45°	550±5%	5000-6000K	White	≧75



(4)

(5)

6

(3)

① CL: Ceiling light


(1)

- ② H: High Power LED Type
- ③ XX: W(White) WW (Warm White)

(2)

- (4) 10W: LED power is 10W
- ⑤ C: AC100-240V
- 6 3C: Cree MCE LED

Product Dimensions:

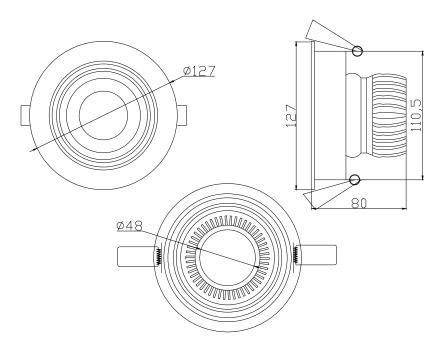


NOTES:

1. All dimensions unit in mm

2.Tolerances is ± 0.5 mm unless otherwise noted.

Package Dimension

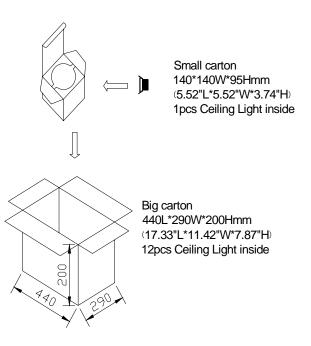

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.