



Features:

- No UV or IR light radiation.
- Provide 260° beam angles.
- Easy Installation:
Using Existing E26/27/B22 Base Fixture
- Very Low Power Consumption:
Less than 4Watts
- Long lifetime: 25000 hours (L_{70}).
- Sturdy Construction:
UV Stabilized glass Lampshade And Aluminium alloy Lamp Shell.
- High CRI: 75-85
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C ~ +60°C.
- 100~240V AC input.

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	E26/E27/B22 Base
Wattage	3W
Power Factor	PF \geq 0.8
Operating frequency	50-60Hz
Operating Temperature	-20℃ ~ +60℃
Storage Temperature	-30℃ ~ +70℃
Net Weight per piece (Kg)	0.135Kg
Certification	CE Approved; RoHS Compliant
Size	∅ 60*108mm

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GL-HWW1W3C3	260°	230 \pm 5%	2900-3300K	Warm White	\geq 80
GL-HW1W3C3	260°	280 \pm 5%	5500-6500K	White	\geq 75

GL/H/XX/1W/3/C/3

① ② ③ ④ ⑤ ⑥ ⑦

- ① GL: Bulb Light
- ② H: High Power LED Type
- ③ XX: W(White) WW (Warm White)
- ④ 1W: The single LED power is 1W
- ⑤ 3: 3pcs of LED
- ⑥ C: AC 100-240V
- ⑦ 3: Crust type


Product Dimensions:

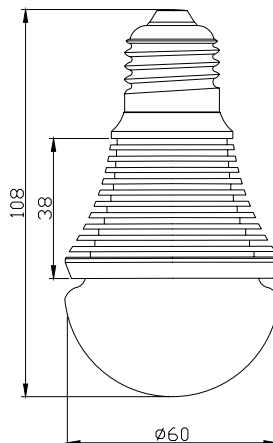

NOTES:

1. All dimensions unit in mm
2. Tolerances is $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension:

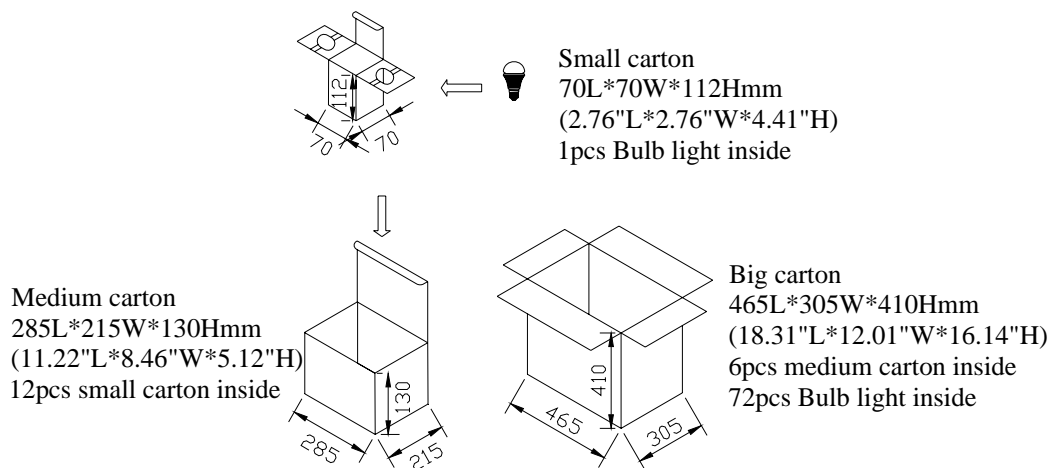

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.