

40.64 mm ( 1.6 ") 16×16 Super Amber  
Dot Matrix LED Displays  
Technical Data Sheet

Part No.: KWM-2016161AUAB

## Features:

- ◇ 1.6 inch ( 40.64 mm) Matrix height.
- ◇ Flat package and light weight.
- ◇ Easy assembly.
- ◇ High quality and low cost.
- ◇ High reliable and intensity.
- ◇ Low power requirement.
- ◇ The product itself will remain within RoHS compliant version.

## Descriptions:

- ◇ The KWM-2016161 series is a large emitting area (1.9mm diameter) LED sources configured in a 256 dots 16\*16 matrix array.
- ◇ These displays provide excellent reliability in bright ambient light.
- ◇ These devices are made with white dots and black surface.





## Applications:

- ◇ Audio equipment.
- ◇ Instrument panels.
- ◇ Digital read out display.


## Device Selection Guide:

| Model No.       | Chip Material | Source Color | Descriptions |
|-----------------|---------------|--------------|--------------|
| KWM-2016161AUAB | AlGaInP       | Super Amber  | Row Anode    |

## Package Dimension:

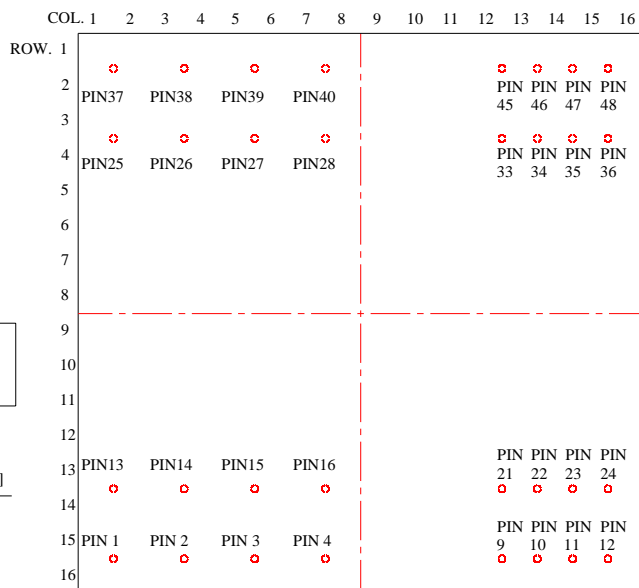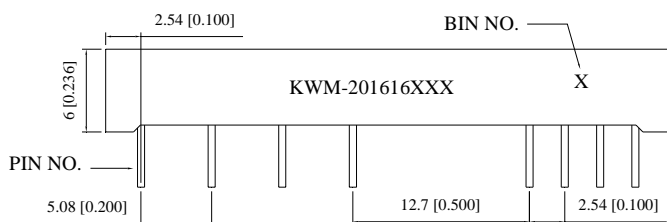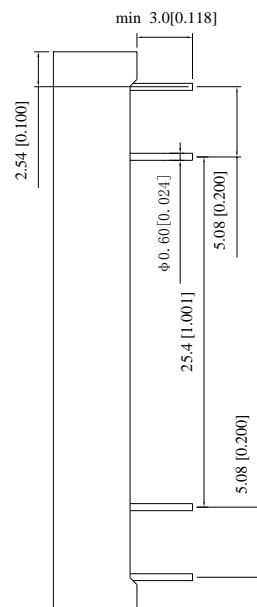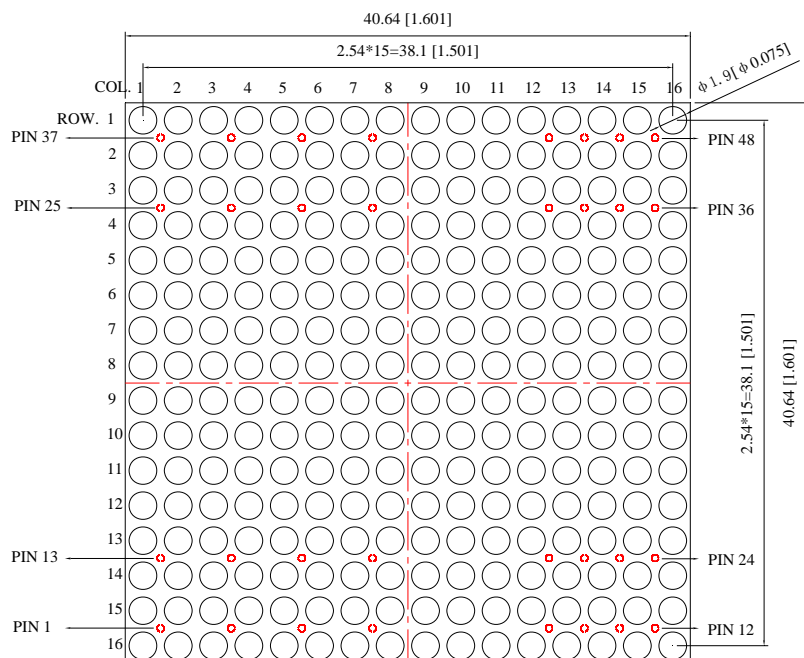

NOTES: All dimensions are in millimeters (inches) tolerance are  $\pm 0.15\text{mm}$  (0.006inch) unless otherwise noted.

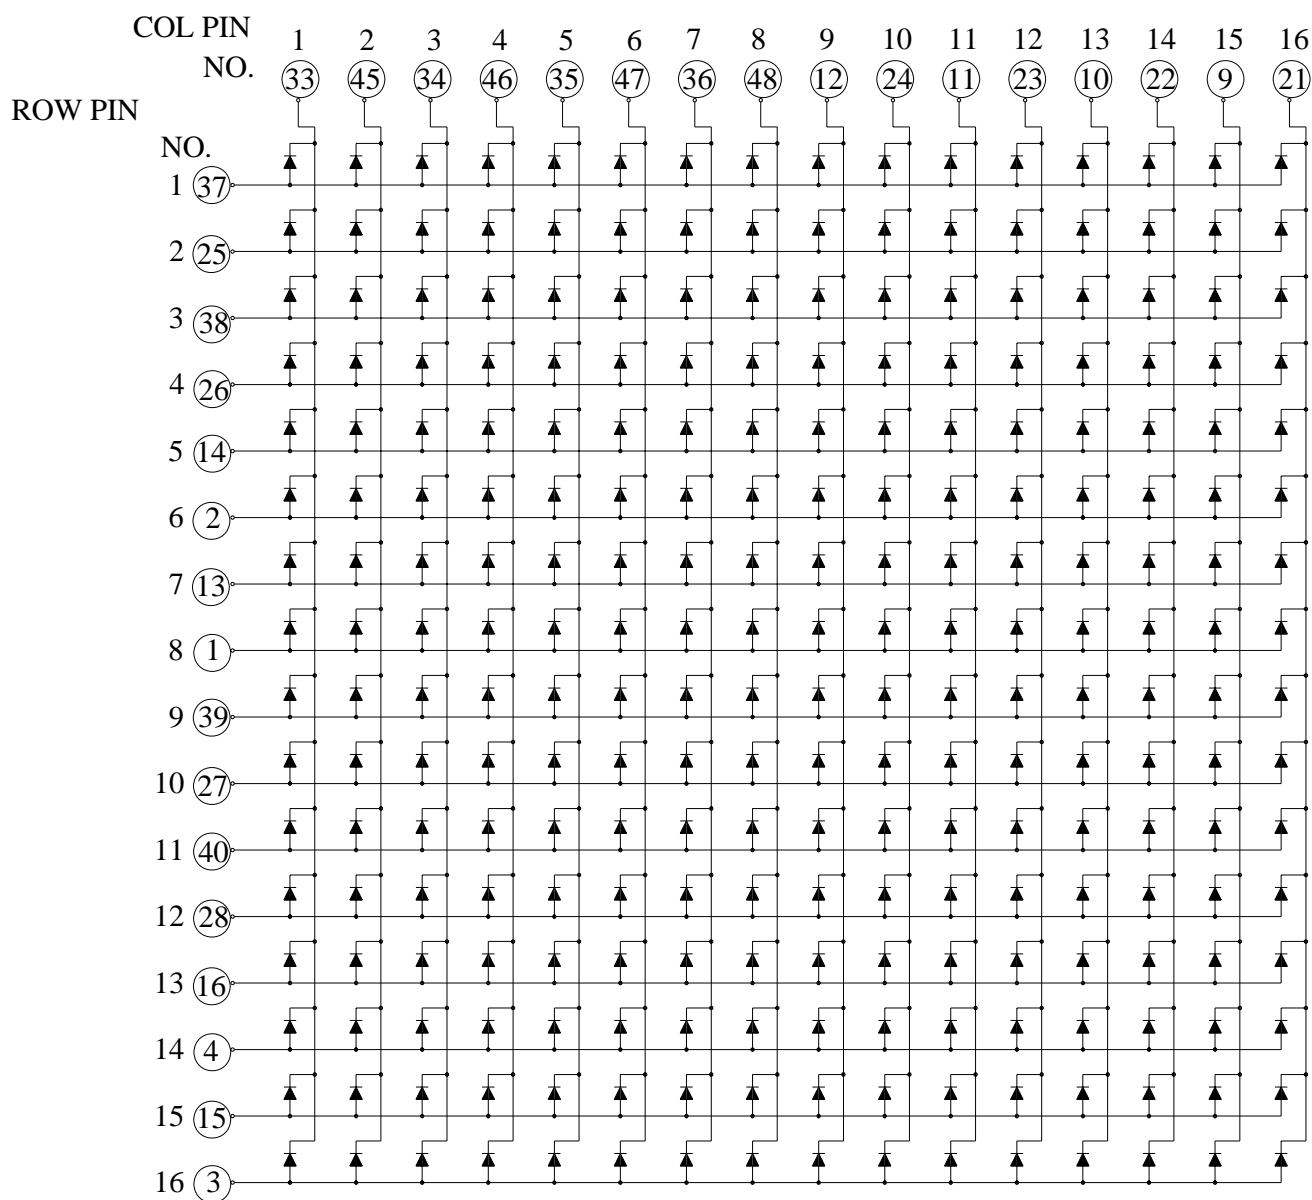

### Absolute Maximum Ratings at Ta=25°C

| Parameters   | Symbol | Max.                | Unit |
|--|--------|---------------------|------|
| Power Dissipation (Per Dot)  | PD     | 52                  | mW   |
| Peak Forward Current (Per Dot)<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | IFP    | 80                  | mA   |
| Forward Current (Per Dot)  | IF     | 20                  | mA   |
| Reverse Voltage  | VR     | 5                   | V    |
| Operating Temperature Range  | Topr   | -40°C to +80°C      |      |
| Storage Temperature Range  | Tstg   | -40°C to +85°C      |      |
| Soldering Temperature  | Tsld   | 260°C for 5 Seconds |      |






### Electrical Optical Characteristics at Ta=25°C

| Parameters  | Symbol           | Min. | Typ. | Max. | Unit    | Test Condition   |
|---|------------------|------|------|------|---------|------------------|
| Luminous Intensity                                | IV               | 80   | 96   | ---  | mcd     | IF=20mA (Note 1) |
| Luminous Intensity Matching<br>Ratio (Dot To Dot) | I <sub>v-m</sub> | ---  | ---  | 2:1  |         | IF=10mA          |
| Peak Emission Wavelength                          | $\lambda_p$      | ---  | 610  | ---  | nm      | IF=20mA          |
| Dominant Wavelength                               | $\lambda_d$      | ---  | 605  | ---  | nm      | IF=20mA (Note 2) |
| Spectral Line Half-Width                          | $\Delta\lambda$  | ---  | 20   | ---  | nm      | IF=20mA          |
| Forward Voltage                                   | VF               | ---  | 2.1  | 2.6  | V       | IF=20mA          |
| Reverse Current                                   | IR               | ---  | ---  | 100  | $\mu$ A | VR=5V            |

#### Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

## Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

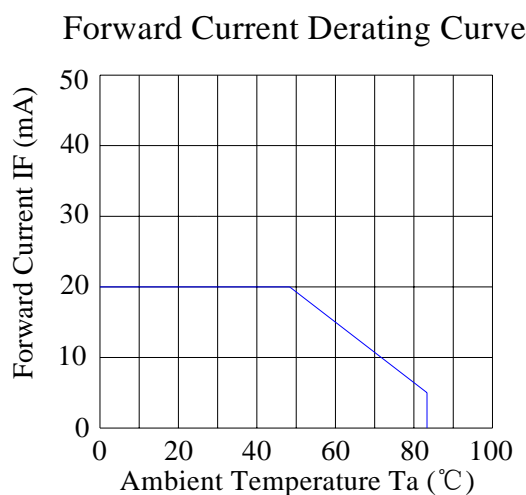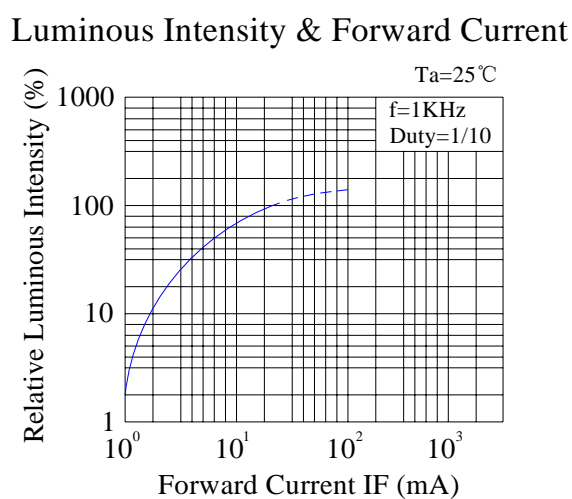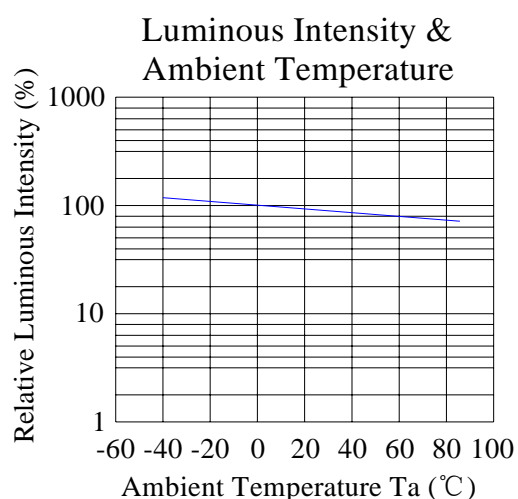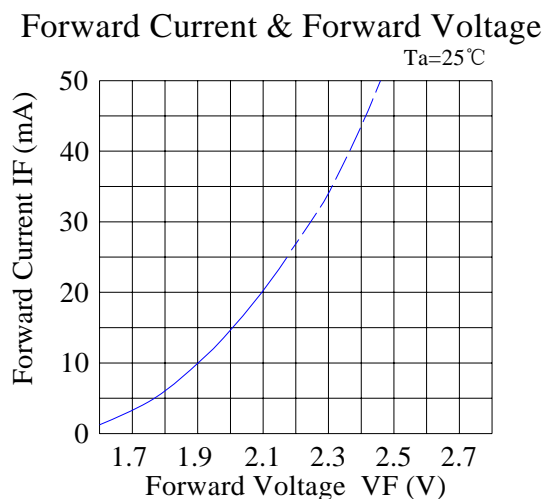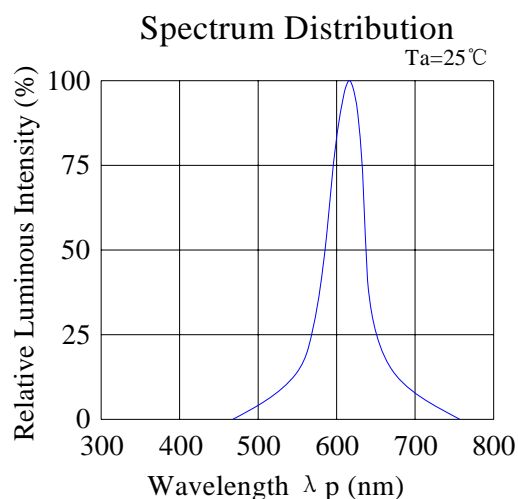

Please read the following notes before using the datasheets:

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

#### 2. Storage

2.1 If the package contains a moisture proof bag inside, please don't open the package before using.

2.2 Before opening the package, the LEDs should be kept at 30℃ or less and 80%RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30℃ or less and 60%RH or less.

#### 3. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260℃ for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 4. Soldering

When soldering, for Lamp without stopper type and must be leave a minimum of 3mm clearance from the base of the lens to the soldering point.

To avoided the Epoxy climb up on lead frame and was impact to non-soldering problem, dipping the lens into the solder must be avoided.

Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:

| Soldering Iron |                                | Wave Soldering |              |
|----------------|--------------------------------|----------------|--------------|
| Temperature    | 300℃ Max.                      | Pre-heat       | 100℃ Max.    |
| Soldering Time | 3 sec. Max.<br>(one time only) | Pre-heat Time  | 60 sec. Max. |
|                |                                | Solder Wave    | 260℃ Max.    |
|                |                                | Soldering Time | 5 sec. Max.  |

Note: Excessive soldering temperature and / or time might result in deformation of the LED lens or catastrophic failure of the LED.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used . It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.