

Features:

- No UV or IR light radiation.
- Provide 155° beam angles.
- Easy Installation:
- Very Low Power Consumption:
Less than 12Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
Organic glass Light guide plate and Aluminium alloy Lamp Shell.
- High CRI: 70-85
- Correlated Color Temperature: 2700-7000K
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.
- LED type:3014 LED

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Hotel Lighting
- Exhibition Hall Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- School Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Light guide plate	Organic glass
Wattage	12W
Power Factor	PF ≥ 0.8
Operating Frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Net Weight per piece (Kg)	1.06Kg
Certification	CE Approved; RoHS Compliant
Fixing ways	Recessed and surface mounted or suspending
Size	300*300*11mm

Product Selection Guide:

Product	Beam Angle	Total Lumens	CCT	Color	CRI
PL-WW100C-3030	155	620 ± 5%	2700-3300K	Warm White	≥ 80
PL-W100C-3030	155	680 ± 5%	5500-6500K	White	≥ 70

PL-/XX/100/C/3030

① ② ③ ④ ⑤

① PL: Panel Light


② XX: WW(Warm white) W(White)

③ 100: 100pcs of LED

④ A: AC100~240V

⑤ 3030: Product size


Product Dimensions:

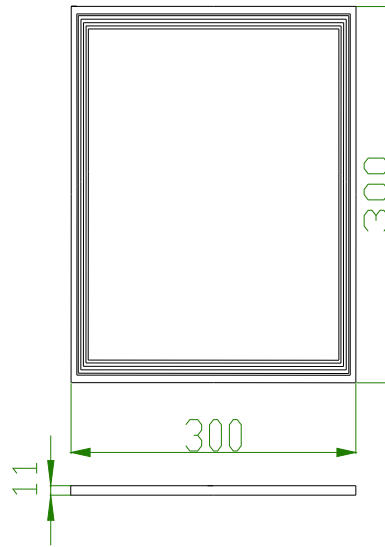

NOTES:

1. All dimensions unit in mm
2. Tolerances are ± 0.5 mm unless otherwise noted.

Package Dimension:

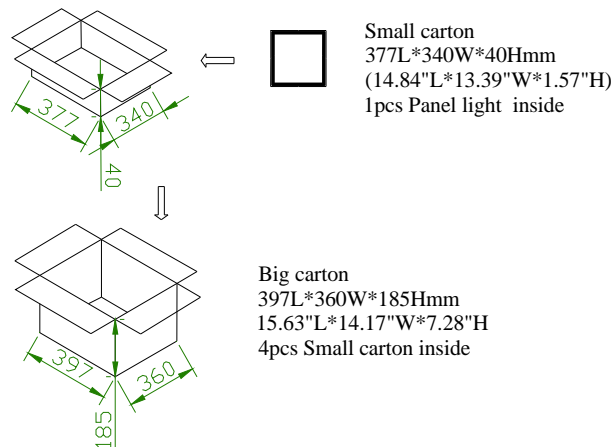

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.