



Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation
- No glare, no stroboscopic
- Fine heat output structure

Features:

- No UV or IR light radiation.
- Provide 180° beam angles.
- Easy Installation:
Using Existing E26/E27/B22 Base Fixture
- Very Low Power Consumption:
Less than 5 Watts
- Long lifetime: 25000 hours
- Sturdy Construction:
UV Stabilized PMMA Lampshade and Aluminium alloy Lamp Shell.
- High CRI: 70-80
- Correlated Color Temperature: 2700-12000K
- Replaces E27 electric incandescent lamp up to 50Watts
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.
- LED type:2835 LED

Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting

Product Specifications:

Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	E27/E26/B22
Wattage	5W
Power Factor	PF ≥ 0.8
Operating Frequency	50-60Hz
Operating Temperature	-20°C ∞ +60°C
Storage Temperature	-30°C ∞ +70°C
Net Weight per piece (g)	68
Certification	CE Approved; RoHS Compliant

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GL-WW20CN	180°	360 ± 5%	2700-3500K	Warm White	PF ≥ 75
GL-W20CN	180°	410 ± 5%	6000-6500K	White	PF ≥ 70

GL/XX/20/CN

① ② ③ ④

- ① GL: Bulb Light
- ② XX: W(White) WW (Warm White)
- ③ 20: 20pcs of LED
- ④ CN:AC100-240V input


Product Dimensions:

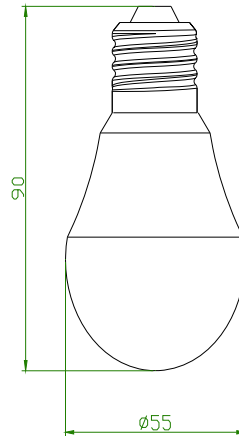

NOTES:

1. All dimensions unit in mm
2. Tolerances are $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension

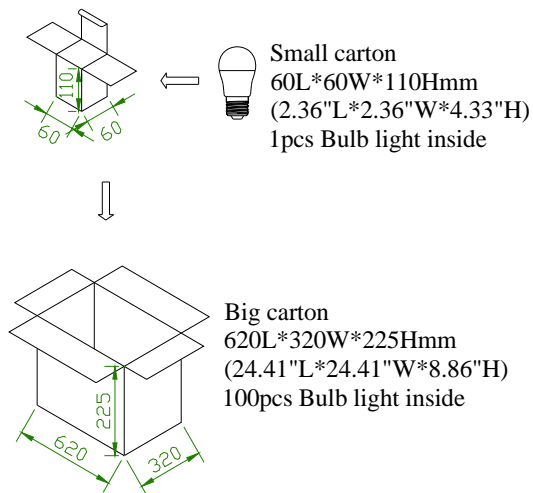

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.