



## Features:

- No UV or IR light radiation.
- Provide 360° beam angles.
- Easy Installation:  
Using Existing E27 Base Fixture
- Very Low Power Consumption:  
Less than 4 Watts
- Long lifetime: 25000 hours
- Sturdy Construction:  
UV Stabilized Glass Lampshade and ABS Lamp Shell.
- High CRI: >80
- Correlated Color Temperature: 2700-3000K
- Replaces E27 electric incandescent lamp up to 40Watts
- Operating temperature: -20°C~+50°C.
- 220-240V AC input.

## Benefits

- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation
- No glare, no stroboscopic
- Fine heat output structure

## Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting

### Product Specifications:

Lamp Shell	Glass
Input Voltage	220-240V AC
Base Type	E27
Wattage	4W
Power Factor	PF ≥ 0.8
Operating Frequency	50-60Hz
Operating Temperature	-20°C ∼ +50°C
Storage Temperature	-30°C ∼ +60°C
Net Weight per piece (g)	34.5
Certification	RoHS Compliant

### Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GL-HWW1W4A	360°	412 ± 2%	2700-3000K	Warm White	≥ 80

**GL/H/WW/1W/4/A**

①      ②      ③      ④      ⑤      ⑥

- ③ GL: Bulb Light
- ④ H: High Power LED Type
- ⑤ WW: WW ( Warm White)
- ⑥ 1W: The single LED Power is 1w
- ⑦ 4: 4 pcs of LED filament
- ① A: AC 220-240V


### Product Dimensions:

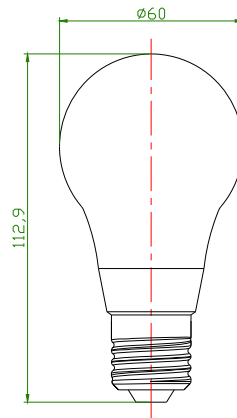

#### NOTES:

1. All dimensions unit in mm
2. Tolerances are  $\pm 0.5\text{mm}$  unless otherwise noted.

### Package Dimension

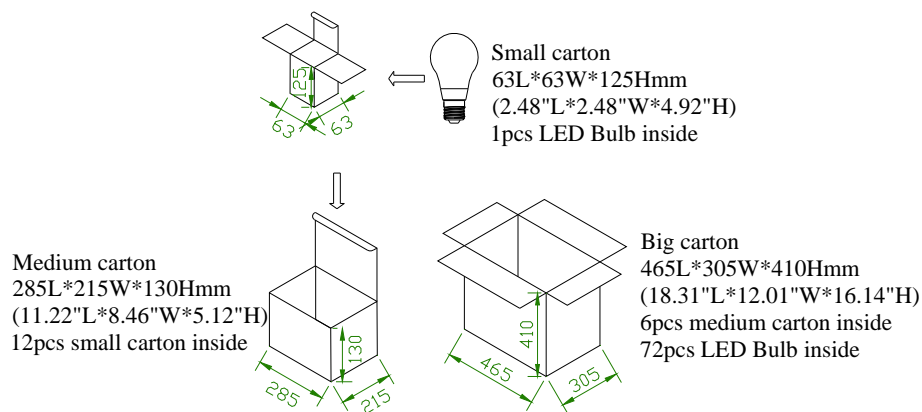

### Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.